

Horizon

Poly Edge E100 & Edge E220 User Guide



Contents

Poly Edge Overview	4
Initial Setup	4
Phone Overview	5
User Interface Overview	9
Home Screen Overview	9
Icons Used on Poly Edge E Series Phones	10
Icon and Status Indicators	10
Busy Lamp Field Icons	11
Call Actions	12
Use the Handset, Headset, or Speakerphone	12
Make a Call	12
Answer an Inbound Call	12
Hold and Resume a Call	12
End a Call	13
Transferring Calls	13
<i>Default Transfer Type</i>	13
<i>Transfer a Call</i>	13
<i>Cancel a Transfer</i>	14
Managing Calls	14
<i>Display Calls from the Lines Screen</i>	14
<i>Reject Incoming Calls</i>	14
<i>Rejecting Calls with Do Not Disturb</i>	14
<i>Enable Do Not Disturb</i>	14
Audio Conference Calls	16
Initiate a Conference Call	16
Join Calls to Create a Conference Call	16
End a Conference Call	16
Hold a Conference Call	17
Resume a Conference Call	17
Hold Mute and Unmute Audio	17
Phone Actions	18
View the Contact Directory	18



Search the Corporate Directory	18
Listen to Voicemail.....	18



Poly Edge Overview

Poly Edge E Series phones are desktop phones with bright color displays that provide superior HD (High Definition) audio with Poly signature NoiseBlockAI and Acoustic Fence features.

Poly Edge E Series phones provide the following features:

- The LED lighting bar on Poly Edge E Series phones indicates various phone states such as call alerts, active call, held call, and voicemail.
- The integrated Microban protection reduces the growth of bacteria and maintains the durability and cleanliness of your phone.
- A dedicated pagination key enables you to add up to three pages to the Home screen.
- Optional Poly Edge E Expansion module for up to 50 lines supported on Edge E550.

Initial Setup


Your Poly Edge phone needs to be connected to a suitable Internet connection and powered using either compatible Power over Ethernet (PoE) or an AC power supply.

It will arrive pre-configured; once connected and powered, you will be prompted to enter and confirm a new administrator password (please note that this can be set to any 3/4-digit combination that isn't 456). Once this is confirmed, the device will register to Horizon, ready for use.




Phone Overview

The following figure displays the hardware features on Poly Edge E100 and Edge 220 Series phones. The table lists each numbered feature shown in the figure.

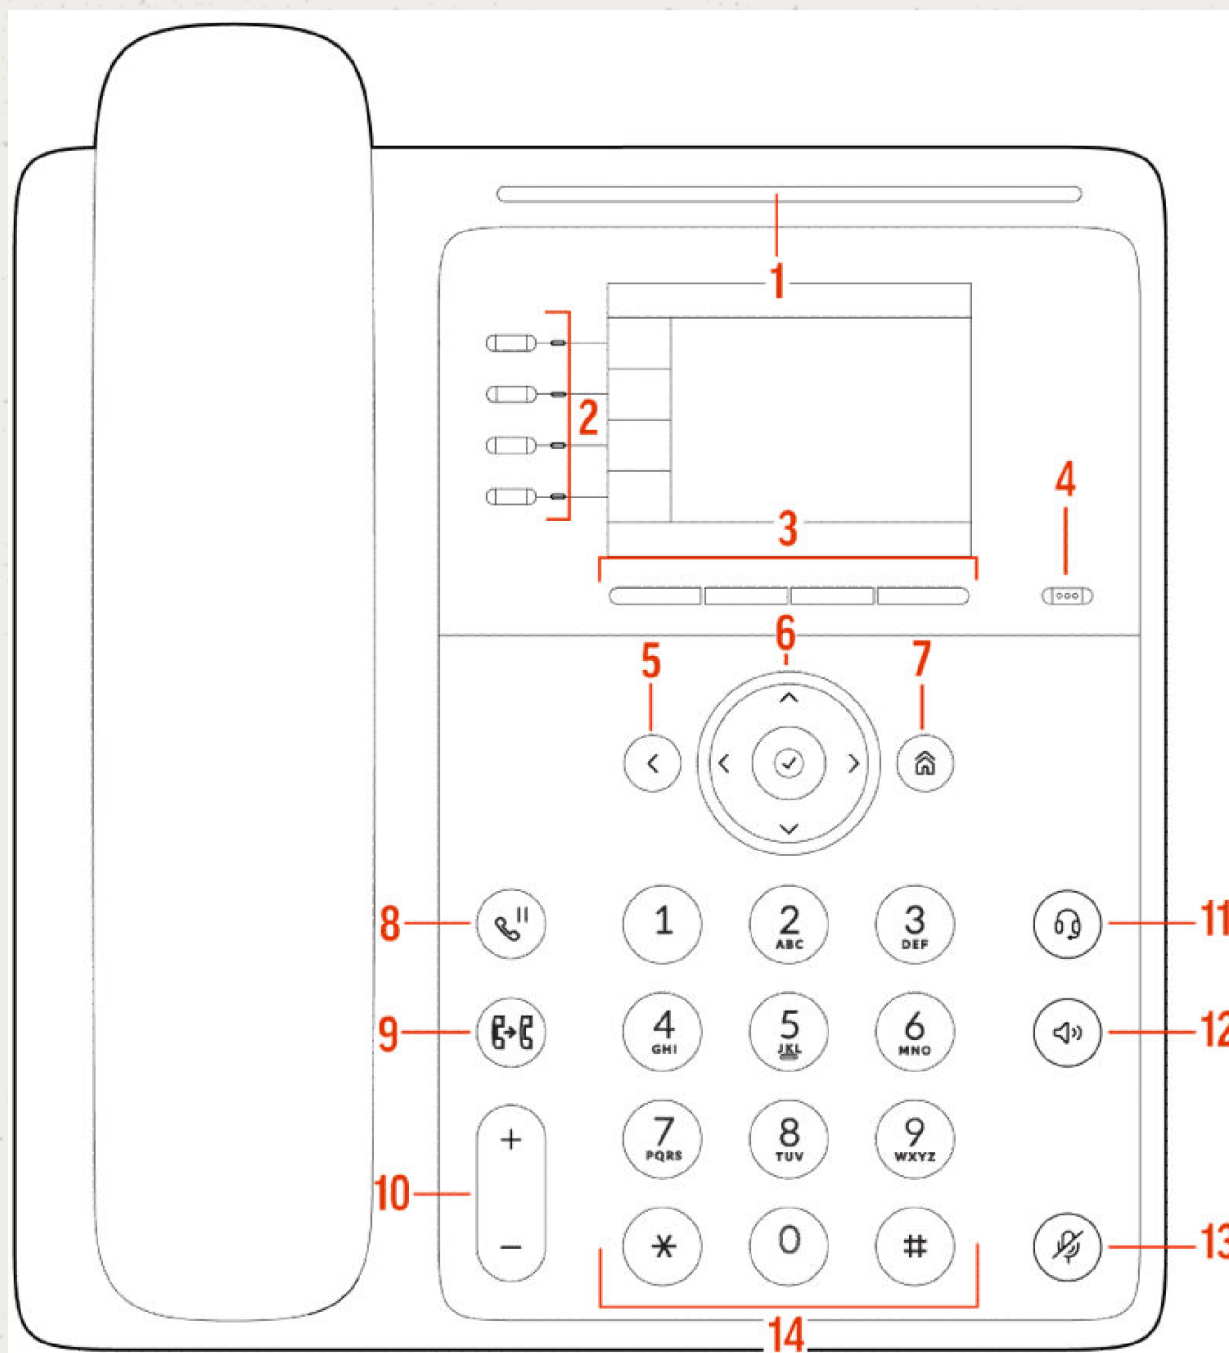

Reference Number	Feature	Feature Description
1	LED bar	Provides call and phone status information.
2	Line keys	Select a phone line, view calls on a line, or quickly call a favorite contact. The Poly Edge E100 supports two keys, and the Poly Edge E220 supports four keys.
3	Softkeys	Select context-sensitive keys that display along the bottom of the screen.
4	Pagination key	View additional line screens.
5	Back key	Return to the previous screen.
6	Navigation keys / Select key	Scroll through information or options displayed on the phone's screen or select a field of displayed data.
7	Home key	Display the Home screen from other screens or display the Lines and Calls screen from the Home screen.
8	Hold key	Hold an active call or resume a held call.
9	Forward/Transfer key	Forward or transfer an active call to a selected contact.
10	Volume keys	Adjust the volume of the handset, headset, speaker, and ringer.
11	Headset key	Place and receive calls through a headset.
12	Speakerphone key	Provides ringer and speakerphone audio output.
13	Mute key	Mute or unmute the microphone during an active call.
14	Dialpad	Enter numbers, letters, and special characters. Use the dialpad keys to select menu items that have index numbers.



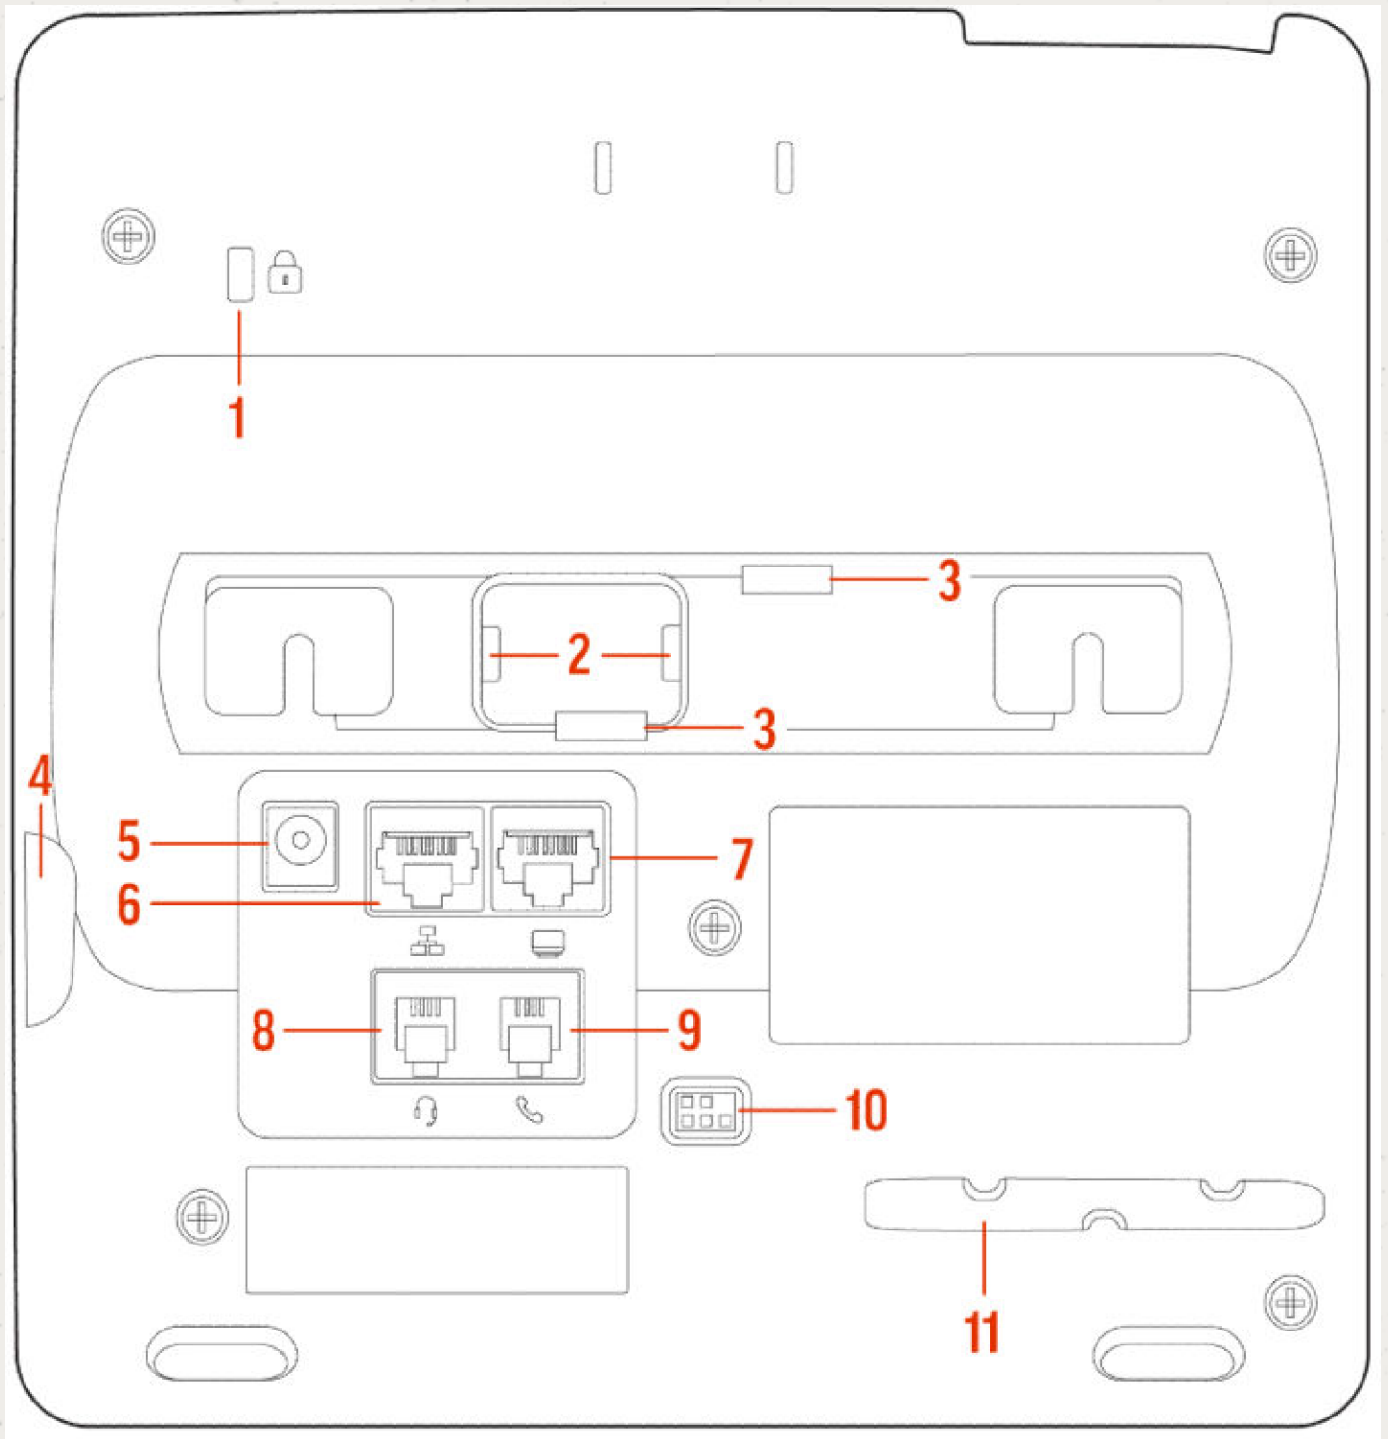

Reference Number	Feature	Feature Description
1	Security slot	Attach a universal security cable lock to your phone so you can secure it to a desktop.
2	Wall mount block retaining slots	Attach the wall mount block to the phone.
3	Stand connection slots	Attach the stand to the phone. This enables the phone to sit at a 30- or 60-degree angle.
4	USB port	Attach a USB headset.
5	Power port	Connect the phone to a power outlet.
6	Network port	Connect the phone to a PoE-supported Ethernet port.
7	Computer connection network port	Connect a computer through your phone for network access.
8	Headset port	Connect a headset to the phone.
9	Handset port	Connect a handset to the phone.
10	Electronic Hookswitch (EHS)	Enables you to use the controls on your headset to answer and end calls.
11	Handset cable slot	Holds the handset cable away from the phone base.



User Interface Overview

Your phone has icons, status indicators, and screens that help you use, navigate, and understand important information about the state of your phone.

Please note, that depending on how your phone is configured:

- You may need to press the More soft-key to access feature soft-keys (e.g. Conference).
- Your home and other screens may look different to those in this guide.

Home Screen Overview

The home screen provides access to and information about calls, line keys, settings, status indicators, and pagination.


On the Home screen, you can do the following:

- Place, answer, manage, and view information about calls.
- View information about assigned feature and line keys.
- View status indicators such as missed calls, voicemail, and error messages in the status bar.
- Access phone features, settings, and information using the softkeys.
- Add, navigate to, and manage pages using the pagination key.

Edge E100 Home Screen



Edge E220 Home Screen

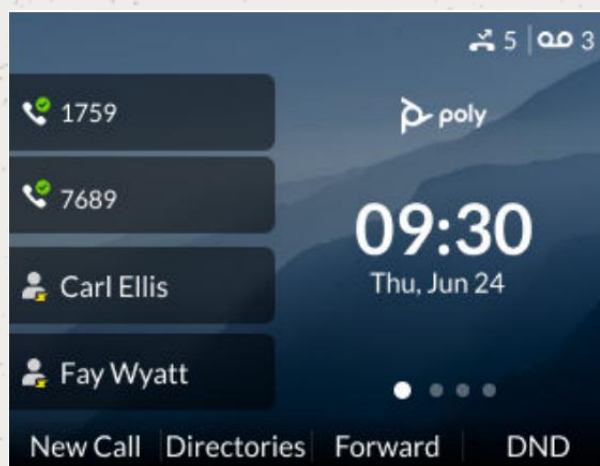

Icons Used on Poly Edge E Series Phones







Poly Edge E Series phones have various icons and status indicators that display the status of the phone whether you are in a call or if the phone is idle.

The following table displays the phone icons and status indicators that display on Poly Edge E Series phones.

Icon and Status Indicators

Icon	Description	Icon	Description
	Registered line		Do not disturb enabled
	Unregistered line		Bluetooth available
	Placing a call		Bluetooth headset connected
	Active call		Mobile phone connected
	Active call using Polycom HD Voice		Bluetooth speaker
	Held call		Wi-Fi connected
	Incoming call		Wi-Fi disconnected
	Active conference		USB connected
	Placed call		Storage media idle
	Received call		Storage media busy
	Missed call		Presence status (Available)
	Phone warning		Presence status (Online)
	Shared line in idle state		Presence status (Offline)
	Shared line in remote active state		Presence status (Not logged in)
	Unregistered shared line		Presence status (Wrap up)
	Shared line with a held call		
	Call forwarding enabled		
	New message		

Busy Lamp Field Icons

States	Line Icons
Monitored line is idle	
Monitored line is busy	
Monitored line is on hold	
Monitored line is unregistered	
Monitored line is set to Do Not Disturb	
Monitored line has an incoming call	









Call Actions

Your phone can manage a maximum of three active, incoming, and held audio calls at a time. However, you can have only one active call in progress with numerous other incoming calls or calls on hold on all phones.

Use the Handset, Headset, or Speakerphone





You can place and answer calls on your phone using the handset, headset, or speakerphone, and you can alternate among the three modes during calls, if available.

When using the speakerphone, the Speakerphone key  glows green. When using the headset, the Headset key  glows green when a headset is connected.

During a call, pick up the handset, press the Headset key  or press the Speakerphone key . For example, if you are using the handset, press the Headset key  to switch to the headset, or press the Speakerphone key  to switch to the speakerphone.

Make a Call



Do one of the following:

- Pick up the handset and press the  key,  key, or the New Call softkey. Then, enter the phone number and press the Send softkey.
- Enter the phone number and press the Dial softkey. Then, pick up the handset, and press  for speakerphone or  for headset.

Answer an Inbound Call

Answer a call using the handset, speakerphone, or a headset.

Do one of the following:

- Pick up the handset, then press the Answer softkey.
- Press the Speakerphone key .
- Press the Headset key .

Hold and Resume a Call

To hold a call, press the Hold key.

To resume a call, press the Hold key again.



End a Call

To end a call, do one of the following:

- Place the handset on the cradle.
- Press **End Call**.

Transferring Calls

You can transfer active or held calls to another person using the following transfer types:

- Blind transfer—Transfers the call directly to another line without speaking with the other party first.
- Consultative transfer—Enables you to speak with the other party before completing the transfer.

Default Transfer Type

You can choose a default transfer type to use for all calls on your Edge E550 phone.

When you choose a default transfer type, the phone uses the selected transfer type for all calls.

Consultative is the default transfer type.



To change your default transfer type:


- 1. Navigate to Settings > Basic > Preferences.
- 2. Select Default Transfer Type and choose a transfer type.


The selected transfer type is used for all calls.

Transfer a Call

1. To transfer a call, whilst in the call, you can do one of the following:

- Press **Transfer**  to use the default transfer type.
- Press and hold **Transfer**  to use the non-default transfer type.

For example, if Blind is the default, press and hold Transfer  to perform a Consultative transfer.

Press Transfer  > More and select Blind or Consultative.

Depending on the default transfer type, either the Blind or Consultative option displays. For example, if the default transfer type is Blind, then you can select Consultative.

2. Dial a number or choose a contact from the Recent Calls or a directory.

If the transfer type is set to Blind, the call is transferred immediately.

3. If the transfer type is set to Consultative, select **Transfer**  after speaking with your contact.



Cancel a Transfer

If a contact does not answer the transfer or you want to remain speaking with the contact on your line, you can cancel the transfer before it is complete.

To cancel a transfer:

- Select **Cancel**.

The call is not transferred and becomes active.

Managing Calls

Display Calls from the Lines Screen

You can see the number of calls on the line from the Home screen. A green light on the line key indicates a line with an active call, and a red light indicates a line with one or more held calls.

When you select a phone line that has a held call, the first held call on that line is automatically resumed, even if you already have an active call on a different line.

To resume the held call press and hold the **line** key 

Reject Incoming Calls

You can reject a call and send the call directly to voicemail. Rejected calls display in the Missed Calls list in your Recent Calls list. Rejecting calls is not available for shared lines.

To reject an incoming call from the Incoming Call screen, select **Reject**.

Rejecting Calls with Do Not Disturb

Do Not Disturb (DND) enables you to set your phone to automatically reject calls when you don't want to be interrupted.

Enable Do Not Disturb

You can enable DND to prevent your phone from ringing and to send all incoming calls directly to voicemail. All calls you receive while DND is enabled are logged in the Recent Calls list.

Enabling DND on shared lines disables ringing only. A visual notification of the call still displays, and you have the option to answer or ignore the call.

Note: When you set your presence status to Do Not Disturb and enable DND on your phone, a message stating that your status is set to Do Not Disturb scrolls under the time display, and the DND icon does not display in the status bar.

To enable DND select **DND**.



Call Forwarding

To forward all incoming calls:

- Select **Forward** soft-key or navigate to Settings > Features > Forward.
- If your phone has multiple lines, select a line.
- On the Forwarding Type Select screen, select a forwarding type (All, No Answer, Busy).
- Enter a contact's number if enabled, and select Enable.

If you selected the No Answer option, enter the number of rings before the call is forwarded.

To disable call forwarding:

- Select **Forward** soft-key or navigate to Settings > Features > Forward.
- If your phone has multiple lines, select a line.
- From the **Forwarding Type Select** screen, select your forwarding type, and select **Disable**.



Audio Conference Calls

Your phone can manage a maximum of three active or held conference calls at a time.

Initiate a Conference Call

You can initiate a conference call with up to two contacts.

Please Note:

Depending on how your phone is configured, you may need to press the More soft-key to access the Conference soft-key.

To initiate a conference call:

- Call a contact.
- When the contact answers, select the **Conference** soft key.
- The call is held.
- Enter another contact's number or select a contact from the directory or the call lists.
- When the contact answers, select the **Conference** soft key.

All call participants are added to a conference call.

Join Calls to Create a Conference Call

You can join one active call and one held call into a conference call.

To join an active and held call into a conference call, do one of the following:

- When you have an active call and a held call, select the **Join** soft key.
- When you have an active call and more than one held call, select a held call and then select the **Join** soft key.

The active call and the selected held call are joined into a conference. If you have multiple held calls, the other held calls on the line remain held.

End a Conference Call

When you end a conference call, your connection to the call and all other participants will end

During a conference call, select **End Call**.

Hold a Conference Call

When you place a conference call on hold, you place all conference participants on hold.

To place a conference call on hold select Hold



Resume a Conference Call

Resuming a held conference call enables all participants to hear the audio of everyone on the call.

To resume a held conference call:

Select **Hold** again or Select **Resume** soft key.



Hold Mute and Unmute Audio

During a conference call, you can mute the microphone so other parties cannot hear you. Microphone Mute applies to the handset, headset, and speakerphone. You can still hear all other parties when you mute your microphone.

During a call, including a conference call, press the **mute** key



- The other parties cannot hear you.
- Press again to unmute the microphone.

Phone Actions

Please note, that depending on how your phone is configured, you may need to press the More soft-key to access the Directories soft-key.

View the Contact Directory

You can view and add contacts to the Local Contact Directory. To view the Contact Directory:

From the Home screen, select the **Directories** Soft Key > **Contact Directory**.

Please note that contacts added to the Contact Directory are saved to your phone only and do not synchronise with the Horizon Personal Directory.

Search the Corporate Directory

You can search for contacts in the Corporate Directory. To do this:

- From the Home screen, select the **Directories** Soft Key > **Corporate Directory**.
- Enter the beginning or all the person's surname you wish to search for using the phone keypad.
- Press **Submit**.

To call the highlighted contact, press the **Dial** soft-key.

Listen to Voicemail

Go to Messages.

Select Message Centre.

From the Messages screen, select Connect.

This will dial straight into the voicemail system.

Follow the voice prompts to access your messages.

